SYSTEM NO.	**SSXL06**

VEHICLES	YEARS
LOTUS EMIRA 2.0T (AMG ENGINE)	2023 AND LATER
LOTUS EMIRA 3.5L V6 SUPERCHARGED	2022 AND LATER

NOTES	Insert

TECHNICAL INFORMATION



NOTES	Insert

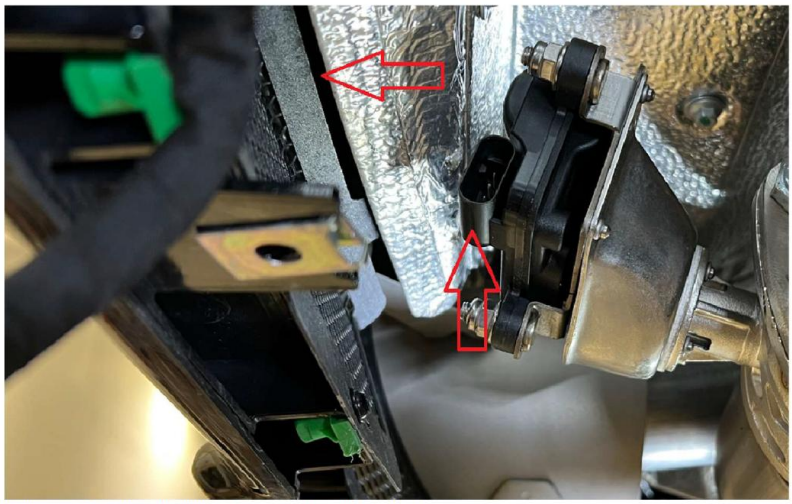


Diffuser removed/Valve controller location.



Diffuser removed/Valve controller location.

1. Unbolt and unclip diffuser from bumper so you can access the exhaust valve.
2. Disconnect vehicle loom plug from factory connector.
3. Connect vehicle loom plug into Milltek AVC loom plug.
4. Connect Milltek AVC loom plug into factory valve controller.
5. Mount Milltek controller in the void behind the numberplate holder and heat shielding.

6. 

Valve controller plug. Void behind numberplate holder location.

Milltek AVC Remote Functions:

1 - Valve Open
2 - Valve Closed
3 - OE functionality

Controller remains in selected mode when ignition is turned off.

These Installation instructions are a guide only, depending on year of build and car Equipment there might be slight differences to the pictures shown.

- Do not remove Plastic panels and covers using high force.
- We will not be reliable for damages to the vehicle in case of inappropriate Installation.
- The use of the Valve Control Module is not legal for Road use- The use will be at your own risk.