SYSTEM NO.	SSXFD365
DESCRIPTION	Cat-back
NOTES	


PARTS REQUIRED

PART NO.	DESCRIPTION	QUANTITY	IN PACKAGE
ACTUATOR01	**Valve Motor (Required on Post Sept 2020 Cars Only) MOO-33**	**1**	
F5084	**Adapter for OE Downpipe**	**1**	
CHC63SS	63mm Band Clamp 304 S/Steel	1	
MSFD244	**Axle Pipe**	**1**	
CHC73SS	73mm Band Clamp 304 S/Steel	1	
MSFD245	**Rear Silencer**	**1**	
CHC73SS	73mm Band Clamp 304 S/Steel	1	
MSFD246	**Valve Assembly Pipe**	**1**	
6MMSPRING	6mm S/Steel Spring Washer	3	
CHC66.5SS	66.5mm Band Clamp-304 S/Steel	1	
F7091	Valve Motor Drive Shaft -Offset	1	
M6X16BUTT	M6 X 16mm Socket Button Head	3	
MSFD273	**Valve Extension Pipe**	**1**	
CHC66.5SS	66.5mm Band Clamp-304 S/Steel	1	
MSFD274	**Connecting Pipe**	**1**	
CHC66.5SS	66.5mm Band Clamp-304 S/Steel	1	
MSFD275	**Tail Pipe**	**1**	
8MMWASHER	8mm Flat Washer Bzp	3	
CHC66.5SS	66.5mm Band Clamp-304 S/Steel	1	
EBC4499	Mounting Rubber	1	
F7066	Loose Mounting Cradle	1	
F7093	Mounting Bracket	1	
M8BZPFLNUT	M8 Bzp Flange Nut Serrated Only	6	
M8X16BZP	M8X16mm Bzp Set Screw-Zinc Pl.	2	
M8X35BZP	M8 X 35mm Bzp Hex Setzinc	1	
MSTIP201	**4.0" Brushed Titanium Tips**	**2**	
CHC66.5SS	66.5mm Band Clamp-304 S/Steel	2	

MILLTEK

TECHNICAL INFORMATION

OE CUTTING INSTRUCTIONS

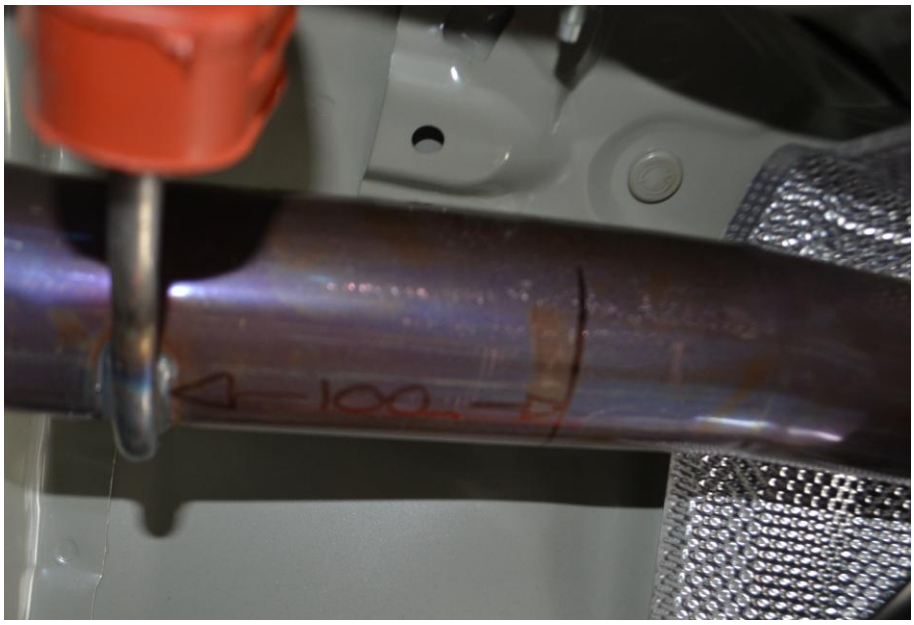

MSFD245 CUTTING INSUTRUCTIONS




CUT 165MM OFF THE LONG OUTLET FROM THE MSFD245 AND REMOVE ANY BURRS AND SHARP EDGES FROM CUTTING

Master Copy Approved By: MILLTEK

MILLTEK

BUMPER SUPPORT BAR & MOUNTING BRACKET



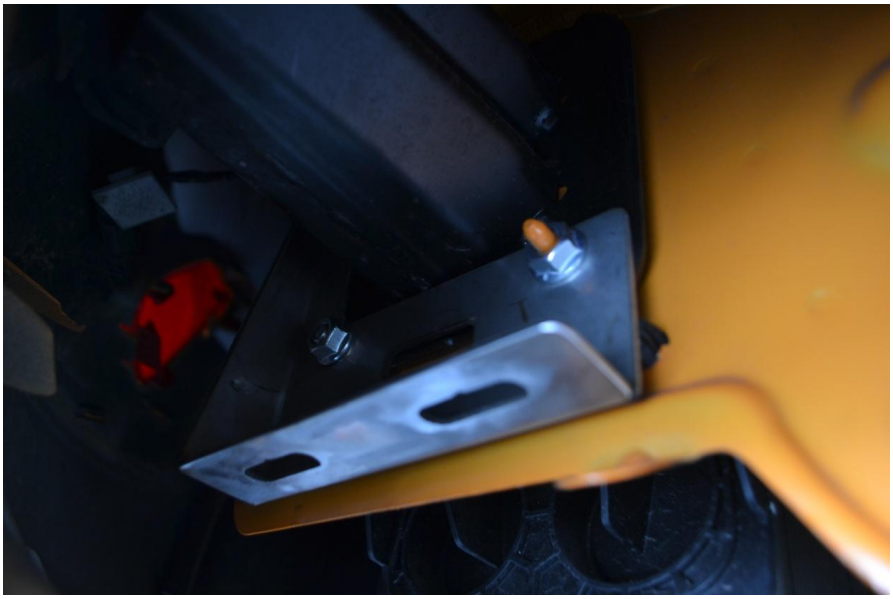

USE THE M8 X 35MM LONG BOLT TO ATTACH THE BUMPER SUPPORT, THIS PROVIDES 3 LEVEL SUPPOORTS FOR THE MOUNTING BRACKET

ATTACHED THE BRACKET SUPPLIED ONTO THE BOLTS ANSD SECURE USING FLANGE NUTS

Master Copy Approved By: MILLTEK