
ALFA GUILIA VALVE CONTROL INSTALLATION




Step 1)

In the trunk of the vehicle lift the cover and remove the clip to gain access to modules



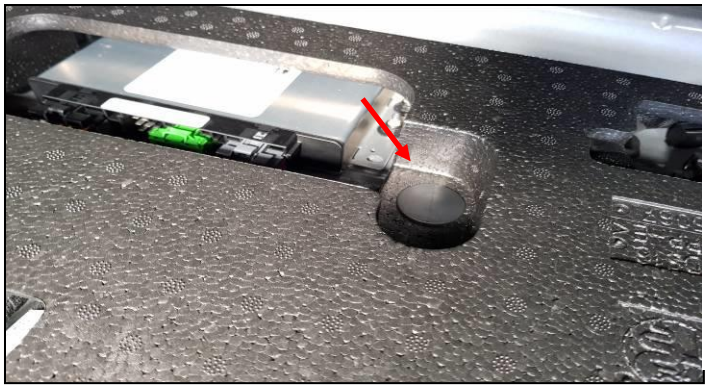

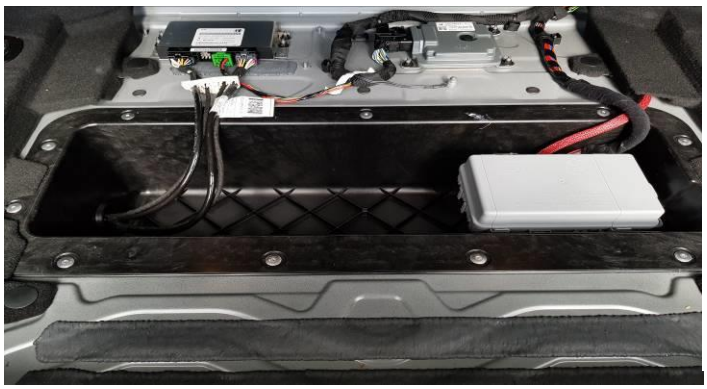




Step 2)

Install the ground wires from two parts of the loom to the point on the side of the module as shown

Now using a meter locate a 12v Switched live connection and connect the red wire with fuse to this

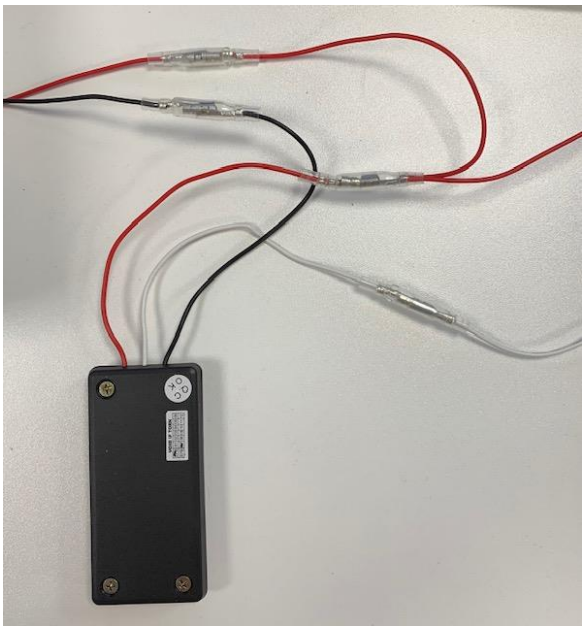

Step 3)

Make the connections as shown: -

White Wire from controls to White wire

For loom for valve

Red wire from fuse loom to red wire from loom for

Valve and Loom from Controller

Step 4)

Now run the cable for the connection to the valve motor via an available grommet in the trunk floor and connect to the valve on the exhaust system