| SYSTEM NO. | **SSXAU972 + SSXAU973** |
|---|---|

| VEHICLES | YEARS |
|---|---|
| AUDI RS3 SPORTBACK 400PS (8Y MQB EVO) - OPF/GPF MODELS | 2021 AND LATER |
| AUDI RS3 SALOON/SEDAN 400PS (8Y MQB EVO) - OPF/GPF MODELS | 2021 AND LATER |
| AUDI RS3 SALOON/SEDAN 400PS (8Y MQB EVO) - NON-OPF/GPF MODELS | 2022 AND LATER |

| NOTES | Insert |
|---|---|

## TECHNICAL INFORMATION



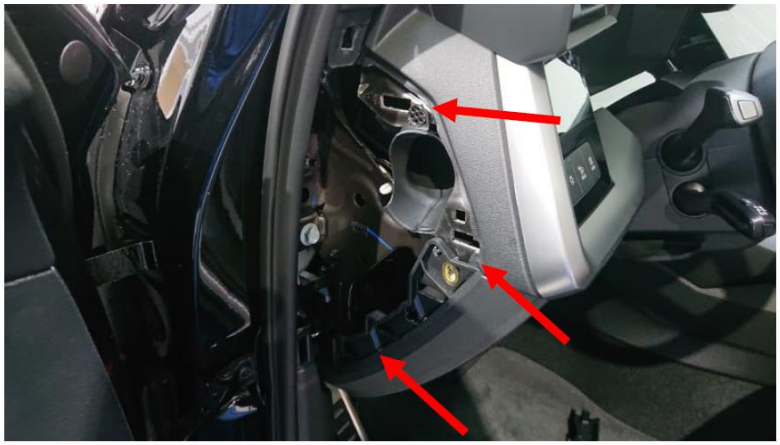
| NOTES | Insert |
|---|---|

Functions:

1. Valve Open
2. Valve Closed
3. OE

These Installation instructions are a guide only, depending on year of build and car Equipment there might be slight differences to the pictures shown.

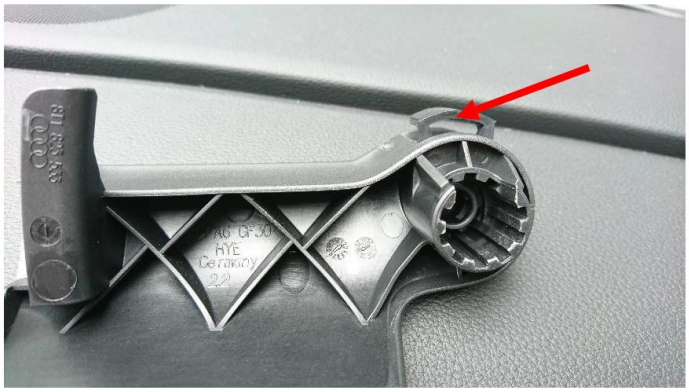
- Do not remove Plastic panels and covers using high force.
- We will not be reliable for damages to the vehicle in case of inappropriate Installation.
- The use of the Valve Control Module is not legal for Road use- The use will be at your own risk.

1. 

Remove Cover.
Cover is fitted with Clips.

2. 

Remove Bonnet Lock Lever.
On the back is a small Locking Clip , see next picture.



Remove the clip and pull out the lever.

3. 

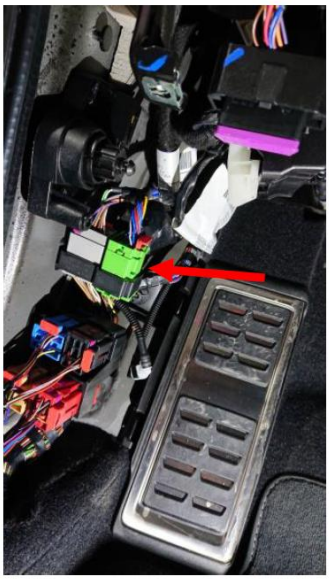
Unscrew the Screw.

4. 

Remove cover under Steering wheel.
2 bolts with 10mm hex.
Remove Torx next to the door.
On the upper end the panel is clipped.

5. 

Remove Door sill panel.
Pull upwards.

6.  
Connect Module to the green connector.

7. Module needs to be connected between the green conectors.

8. 
Connect to OE Ground under Carpet.

9. Stow Module and wiring.

10. Re assembly opposite to disassembly.